


Sortie de câble 1M 4x0.35²
cable output 1M 4x0.35²
Anschlusskabel 1M 4x0.35²



Angle de réglage 0° à 90°
Adjusting angle : 0° to 90°
Einstellwinkel 0 bis 90°

1 M3 screw with a nylon piece without head to maintain the lighting during the adjust
1 vis sans tête M3 à bout nylon pour maintenir les éclairages lors du réglage
M3 Schraube ohne Kopf mit Nylon am Ende, um Lichtelement während der Justage zu fixieren

2 M3 needle screws without head for block lightings when we used the product
2 vis sans tête M3 pointeau pour bloquer les éclairage lors de l'utilisation du produit
Zwei M3 Schrauben, um die Einstellung für den Betrieb zu blockieren

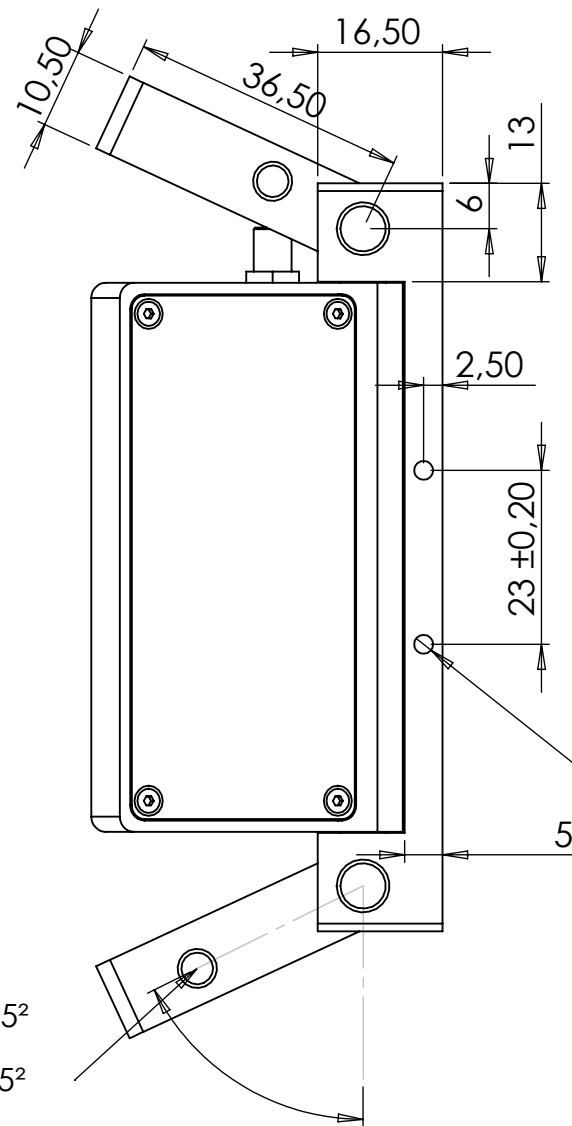

2xM3∇ 13 sur les 4 côtés pour la fixation
2xM3∇ 13 on the fourth sides of fixation
2xM3∇ 13 auf jeder Seite zur Montage

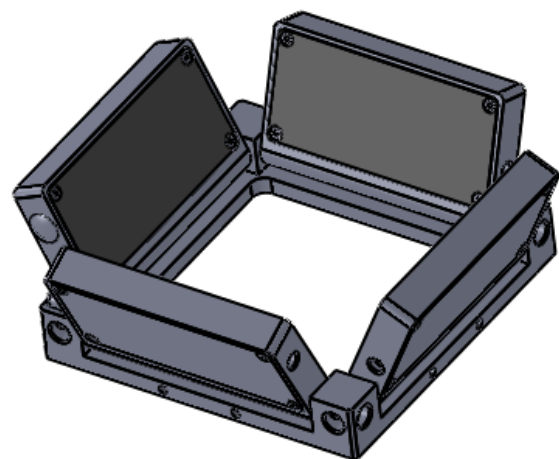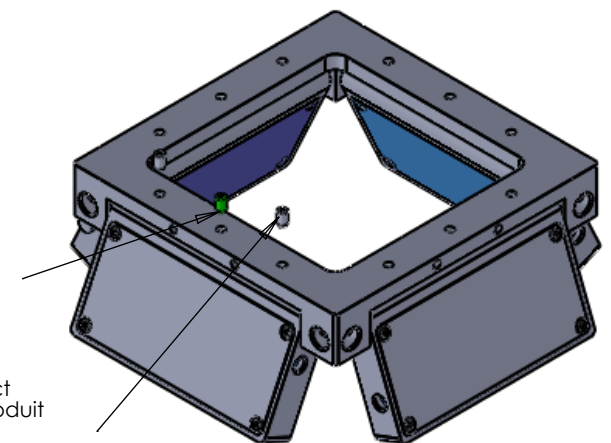

DO NOT SCALE DRAWING				REVISION	C
PROJECT : SQUARE LIGHT RGB					
TITLE: Plan Client Customer Drawing Kundenzeichnung					
PLAN N° : EC-03-059-199				DATE	10/06/09
				DESS.	CHARTIER.A
SCALE:1:2		FOLIO 1 OF 1			