

## MR - RING

A MODULAR RINGLIGHT ILLUMINATION

► MACHINE VISION ► HIGH POWER LED ► DIRECT ILLUMINATION ► BI-COLOR RING ► 4 INDEPENDENT QUADRANTS ► OVERDRIVE ► REMOTE CONTROL

## INNOVATIVE LED ILLUMINATION FOR MACHINE VISION

### 2 SIZES

80 mm

OR

130 mm

### 2X2 COLOURS



OR



### CONTROL

manual

OR


remote



IP65



OVERDRIVE



4 QUADRANTS

The MR-RING is a bi-colour LED illumination, available in 2 sets of colours and 2 dimensions. It has been designed with tough production environments in mind: IP65 as standard, overdrive embedded, simple remote control capability (selection of colours and quadrants).

#### DIRECT LIGHT CAN BE USED WHEN:


- objects do not reflect light (matt surface),
- objects require maximum illumination brightness (e.g. fast moving items),
- objects where shadows are not going to be present or cause problems.

The MR-RING should be mounted so that the light shines directly onto the object of interest. Maximum illumination intensity will be achieved when the item is closest to the light.


The camera can be mounted looking through the ring or to the side dependent on desired effect.

The MR-RING can also be used for applications where a machine enclosure is being used to provide reflected diffused light. The MR-DOME version may also be appropriate.

LIGHTING METHOD



DIRECT




## MANUAL SETTINGS



**SECTORS:** 3 configurations



**COLOURS:** 2 sets

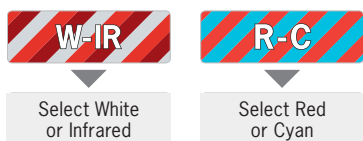

Select White or Infrared


Select Red or Cyan



**REMOTE control**

**MANUAL control**

## REMOTE SETTINGS

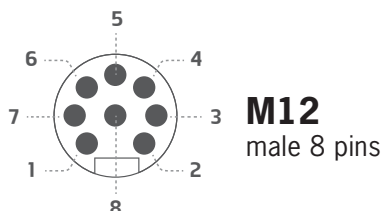

**M12**  
male 8 pins

- 1 Activate overdrive
- 2 Change colours
- 3 GND
- 4 Sector 1
- 5 Sector 2
- 6 Sector 3
- 7 Sector 4
- 8 Deactivate manual sector drive

## LIGHTING POWER

	RING 80				RING 130			
	RED (cd)	CYAN (cd)	WHITE (cd)	IR (mW/Sr)	RED (cd)	CYAN (cd)	WHITE (cd)	IR (mW/Sr)
<b>Standard</b> (distance: 0 cm)	43	55	315	150	65	82	465	220
<b>Overdrive</b> (distance: 0 cm)	172	195	1 260	600	260	286	1 920	900

## TECHNICAL SPECIFICATIONS

Dimensions	80mm	130mm
Electronics		
Power Supply	24 VD/C ±10%	
Functioning Mode	Continuous, Strobe, Overdrive, Dimming, Manual Control	
Rising Time	10 µs	
Falling Time	10 µs	
Wiring	5 Pin M12 male connector for manual, 8 Pin M12 male connector for remote control	
Max. consumption Red-Cyan	9W average / 51W peak	11W average / 82W peak
Max. consumption WHHR	10W average / 42W peak	13W average / 62W peak
Optics		
Colour	Red (625nm) - Cyan (505nm) and White (WHI) - Infrared (860nm)	
Number of LEDs	96	144
Mechanical		
Dimensions (external)	136 x 193 mm	197 x 257 mm
Height	Lighting part: 11 mm – Wiring part (with connectors): 31 mm	
Weight	360 g	550 g
Material	Aluminum & ABS	
Mounting/Fixing	2x M5 Screws	
Environment		
Operating Temperature	-10° to +40°C / 80% of humidity without condensation No thermal shock (max temperature variation: 10°C in 24h)	
Storage Temperature	-20° to +60°C / 80% of humidity without condensation No thermal shock (max temperature variation: 10°C in 24h)	
IP Protection	IP 65	
Labels	RoHS-CE-WEEE	

## HOW TO BUILD YOUR PRODUCT REFERENCE

### REQUIRED SETTINGS

MR	USEFUL DIMENSION	COLOUR	VERSION
	80 130	WIR RC	R RING

### EXAMPLES :

MR - RING 80mm white-IR LEDs → **MR-80-WIR-R**  
MR - RING 130mm red-cyan LEDs → **MR-130-RC-R**

## BINNING INFORMATION

TPL VISION IS EXTREMELY CAREFUL ABOUT BIN SORTING IN THE SELECTION OF LEDS FOR THEIR PRODUCTS.

Specifically for the Cyan series on this product, the human eye is very sensitive to colour variations. It may appear to the customer that they do not appear the same between two cyan LED products. Despite any noticeable differences, **the peak wavelength variation DOES NOT EXCEED 10NM.**

Here are the following bandpass camera filters we recommend to fit with the MR - RING:

- White LEDs: no filter required
- Infrared LEDs: LP 830 (<http://midopt.com/filters/lp830/>)
- Red LEDs: BP 635 (<http://midopt.com/filters/bp635/>)
- Cyan LEDs: BP 505 (<http://midopt.com/filters/bp505/>)


We advise using bandpass filters from MidOpt: [www.midopt.com](http://www.midopt.com)


## OPTICAL TRIGGER




The **Optical Trigger** is an easy solution to connect the MR-RING to your smart camera, **without a wired connection**. Whenever the camera's **embedded light** is on, the Optical Trigger automatically sends a signal to the external light. Using the Optical Trigger, you can get a perfect **synchronization** of the MR-RING with the camera software very easily.

## RELATED PRODUCTS


M12 female 8 pins cable	
REMOTE CONTROL	
	
3 meters	Ref: C-M12-8P-3M
5 meters	Ref: C-M12-8P-5M
10 meters	Ref: C-M12-8P-10M

M12 female 5 pins cable	
POWER SUPPLY	
	
2 meters	Ref: C-M12-5P-2M
5 meters	Ref: C-M12-5P-5M
10 meters	Ref: C-M12-5P-10M

M12 female / male 5 pins cable	
MR - RING / OPTICAL TRIGGER	
	
0.3 meters	Ref: RA-M12-FM-5P-0.3M

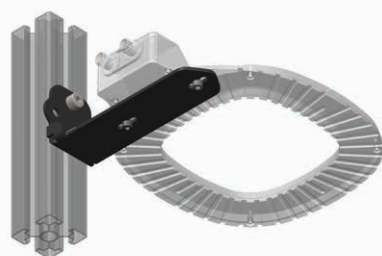Mounting device	
	
Ref: TPL-MOUNT-MR	

## OTHER VERSIONS

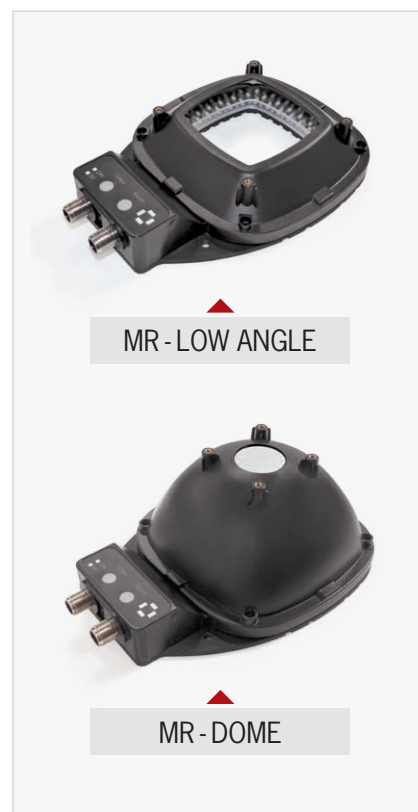

Features and presentations liable to modifications without prior notice. Ref.TS-030401-E1, 2022/03 Edition.

### TPL VISION UK

Brenchley House - School Road - Charing - Kent TN27 0JW - UK  
Tel. +44 (0)1738 310 392 - [contact@tpl-vision.co.uk](mailto:contact@tpl-vision.co.uk)

[www.tpl-vision.com](http://www.tpl-vision.com)



### Other available documents :

- PDF, DXF, STEP DRAWINGS (on demand)
- USER GUIDE

### MR - RING

