



# WATERPROOF IP69K WASHDOWN BARLIGHTS

FOR FOOD, BEVERAGE & PHARMACEUTICAL MACHINE VISION APPLICATIONS:

- Product, packaging & label inspection
- Manufacturing Process Control

- ➡ Pick & Place robotics
- Foreign object detection
- Aseptic manufacturing

IP69K washdown lights provide HIGH BRIGHTNESS,
UNIFORM ILLUMINATION in a reliable package
designed to withstand the rigours of harsh
chemical cleaning & de-contamination.



- Smooth cylindrical surfaces for **RAPID CLEANING**
- **✓** Wide range of **CLEANING SOLVENTS**
- ✓ Suitable for **HIGH HUMIDITY** environments
- ✓ Wide ambient OPERATING TEMPERATURE range
- ✓ LONGEST BARS on the market up to 1250mm
- Swivel mounting brackets for **EASY INSTALLATION**
- ✓ 6 COLOUR OPTIONS covering most applications
- Simple, **PLUG & LIGHT** 24VDC operation
- CURRENT CONTROLLER
  & single M12 connection
- **✓** 3 YEAR WARRANTY
- **✓** SHORT LEAD-TIME



**IP69K WASHDOWN LIGHTS** 

are so much more than a light in a waterproof casing! Read our Tech Note to understand WHY you may need a TPL Vision IP69K Washdown light.











# LIGHTING METHODS







DIRECT


DARKFIELD

LINE SCAN

## SUITABLE FOR HARSH FOOD & CHEMICAL ENVIRONMENTS.

Backlight version available: see Waterproof IP69K Washdown Backlight Bars.


# LIGHTING AREA

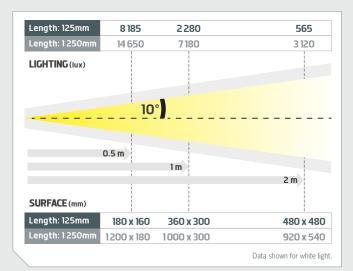

### TECHNICAL DATA

O	24 V/D0					
Operating voltage	24 VDC					
Supplied cable length	5 meters					
Operating modes	Continuous and Strobe					
Trigger (strobe) mode	PNP & NPN					
Rise time / Fall time	15 μs / 10 μs					
Dimming control	Yes, 100% - 35%					
Ambient temperature	-20°C to +60°C (-4°F to +140°F)**					
Ambient humidity	80% max					
IP rating	IP69K (IEC 60529)					
Housing	316L stainless steel / food grade PPMA					
L-Brackets (included)	Design permits 360° rotation of light					
Warranty	3 years (UV: 1 year) *See www.tpl-vision.com/warranty					
Labels	RoHS / CE / UKCA / WEEE					
Country of Origin	Made in France					
Tariff Number	94054990					
COLOURS: UV 405 WH	HI 470 525 630 IR 850					
DIFFUSER OPTIONS:						
	OPAQUE SATIN POLARISED to remove reflections					

SIZE OPTIONS

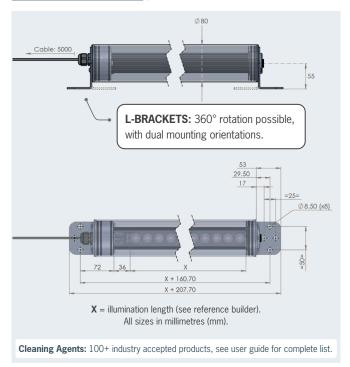

\*\* See Technical User Guide

TPL Vision has the best solutions for IP69K lights on the market.

We searched the world and have tried many different lights, but nothing comes close to TPL's quality.

They have helped us surpass the industry standard and have taken our product to the next level."

Jeff Youngs, President and CEO, ProSpection Solutions, LLC



LENGTH (cm)	WAVELENGTH (nm or WHI)		LENS TYPE		ENCLOSURE RATING		DIFFUSER AND POLARISER OPTION	
125	WHI	7	(±7°)		IP69K		DO	(opaque)
250	405	10	(±10°)				DS	(satin)
375	470	9-16	(±9-16°)				POL	(polariser)
500	525	17	(±17°)			(1	eave blank f	or clear window)
625	630	25	(±25°)					pe fitted retrospec- specified at time
750	850	NL	(no lens)			0	f order.	
875								and POL options are or the UV 405.
1000							he POL optio with the IR 85	n is not compatible <b>0</b> .
1125	EXAMPLES:							
1250	<ul><li>EBAR+ IP69K 125mm whi</li><li>EBAR+ IP69K 500mm gre</li></ul>				EBAR-125-WHI EBAR-500-525			

## ACCESSORY

### SAFETY GLASSES



Reference: EYE-PROTECT

# LOAN EQUIPMENT

# Loan equipment is available for evaluation.

Please contact your TPL Vision Sales Executive for more information:

contact@tpl-vision.co.uk





EMAIL contact@tpl-vision.co.uk

www.**tpl-vision**.com

Ref.TS-070301-C2, 05/2025 Edition.